



PCT/GB2003/002743 #2



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 25 JUL 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*W. Evans*

Dated 10 July 2003

**BEST AVAILABLE COPY**

29 JUN 2002

NEWPORT



1/77

01JUL02 E729744-12 D01559  
P01/7700 0.00-0215087.8

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

1. Your reference

BKCD/CS/ADL.11

2. Patent application number

*(The Patent Office will fill in this part)*

29 JUN 2002

0215087.8

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*Alan Dick & Company Limited  
The Barlands  
London Road  
Cheltenham GL52 6UTPatents ADP number *(if you know it)* 06572382001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

A Phase Shifting Device

5. Name of your agent *(if you have one)*"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*Wynne-Jones Laine & James  
22 Rodney Road  
Cheltenham GL50 1JJPatents ADP number *(if you know it)*

1792001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number  
*(if you know it)*Date of filing  
*(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

Yes

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s) 2

Abstract

Drawing(s) 5 + 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Wynne-Jones Laine & James

Date 28.06.2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr B Dunlop 01242 515807

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

### "A Phase Shifting Device"

This invention relates to a phase shifting device for an array of antenna elements and in particular, but not exclusively, to a ground-tilting antenna including such an array.

5 For a variety of reasons it may be desirable to induce and adjust the phase difference between signals emitted from a plurality of antenna elements in an array and one particular example of this is when the array forms a ground tilting antenna. It is well known by designers of wireless cell networks, such as mobile phone networks, that there is a continuous compromise to be made  
10 between coverage, capacity and quality. Maximum coverage is achieved by emitting a horizontal beam, but in periods of peak capacity it is found that there is often interference or calls simply dropping off, with such an arrangement. In general, therefore, antenna are tilted downwardly by about  $5^\circ$ . It has, however, been appreciated that even a fixed tilt is not ideal, because it does not allow for  
15 changes in usage within the cell either on a short-term basis or a long-term basis. Many aeriels are therefore mounted on the system which can mechanically alter the tilt of the aerial, but these require an engineer to visit the site and they often require the antenna to be switched off during adjustment.

Proposals have, accordingly, been made to alter the tilt of the radiating  
20 beam electrically by inducing phase changes along the length of the array corresponding to tilts of various angles. However, these have tended to introduce their own mechanical and control complexities. For example, in WO 01/03233 a phase shift system is described in which the phase is altered by altering the line length for any given antenna by varying the insertion or  
25 withdrawal of generally C-shaped conductor portions lying within, but not touching, folded conductors that form part of the line. This requires fabrication and assembly to a fine degree of tolerance and the mechanical arrangements

for achieving continuous adjustment of the phase in different senses in different parts of the array in a co-ordinated manner are complex. Other approaches are to use moveable dielectric bodies such as described in US-A-2002/0003458 or a slidable T-junction arrangement as described in US-A-5801600. In each case the construction is complex and co-ordinated alteration of the phase shifts is difficult to obtain.

From one aspect the invention consists in the phase shifting device of an array of antenna elements having respective antenna feed lines formed on a printed circuit board with respective open circuits formed therein, the device including an body slidable relative to the printed circuit board and carrying a plurality of conductive strips for forming a RF connection across respective open circuits, the strips being formed such that any given feed line is lengthened by movement of the element in one direction and shortened by movement in an opposite direction.

Conveniently the conductive strips are generally C-shaped and there may be one set of conductive strips which are oppositely sensed from another set, such that on movement in one direction, the one set of strips moves to lengthen their respective feed lines, whilst the other set shorten their respective feed lines. The conductive strips are preferably capacitively connected to their respective feed lines.

The body is preferably a rigid RF transparent block and the conductive strips may be printed on the surface of the block or they may be formed on the flexicircuit that is fixed to the block, with the body of the circuit interposed between the block and the printed circuit board so that there is no friction on the conductive strips to damage them. A lamination process may be used.

The invention further includes a phase changing assembly including a printed circuit board for a array of antenna elements, the board having

respective antenna element feed lines formed thereon, each feed line having an open circuit formed therein, a phase shifting device as claimed in any one of the preceding claims with the body slidably mounted with respect to the printed circuit board and an actuator for causing slidable movement.

5            Preferably the printed circuit board is elongate and the body is moveable in the longitudinal axial path, which incorporates the one and the other direction movement defined above.

10           The invention still further includes a ground tilting antenna array comprising assembly as claimed above where the antenna elements are mounted in the vertical elongate array with the upper antenna element connected to the feed lines whose length is lengthened when the body is moved in the one direction and the lower antenna elements are connected to the feed lines whose length is shortened when the body is moved in the one direction whereby a phase shift can be caused along the length of the array.

15           Although the invention has been defined above it is to be understood that it includes any inventive combination of the features set out above or in the following description.

20           The invention may be performed in various ways and specific embodiments will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 is a view from above of the main operative portion of a phase changing assembly;

Figure 2 is an enlarged view from above and to one side of the assembly;

Figure 3 is a view from above of the printed circuit board of the assembly;

25           Figure 4 is a view from above of the flexicircuit of the assembly; and

Figure 5 is a schematic view of an antenna array.

Turning to Figure 5, the antenna elements, which form an array 1 to 10, from one side of a dual polar array are schematic illustrated. A corresponding set (not shown) will be provided in a dual polar array to radiate the other polarisation. The aeriels 1 to 10 are arranged in pairs and each pair (eg 1,2) radiates with the same phase. The antenna elements 1 to 10 are connected to an input 11 by bifurcating feed lines 12 that include phase shifting devices 13, which are located in the feed lines 12 so that a respective individual phase shift, with respect to the pair 5,6, can be induced in each other pair of antenna elements. Thus, in the arrangement indicated in Figure 5, if antennae 5,6 are taken to have zero phase, antennae 3,4 are shifted in the negative sense by one phase unit, whilst 1,2 are shifted negatively by two phase units. Conversely, 7,8 are positively shifted by one phase unit and 9,10 are positively shifted by two phase units. By inducing a phase distribution of this type along the array one can vary the effective down tilt of a ground-tilting antenna which is mechanically fixed at a 5° down tilt from between 0 to +10°.

Turning now to Figures 1 to 4, the Applicants' preferred construction for obtaining such a phase shift will be described.

As can best be seen in Figures 1 and 2, a phase shifting device is generally indicated at 14 and generally comprises a rigid chassis 15, in the form of an aluminium plate, which can form a ground plane for the feed lines 12 pinned on a printed circuit board 16 which is mounted on the chassis 15, a rigid RF transparent block, eg of polycarbonate, 17, which is fixed to an actuator arm 19 and mounting bolts 20 for slidably mounting the block 17 and actuator 19 on the chassis 15. A flexicircuit 18 can just be seen attached to the block 17.

Turning to Figure 3, feed lines 12 are shown printed on the printed circuit board in a conventional manner. They can be microstrip as illustrated or stripline or any other suitable transmission line. The lines are

be printed, etched or formed on the board 16. It will be seen that the feed lines patterns 12 are completely symmetrical, to accommodate the dual polar antenna array and the arrangement will be described in connection with one side of the array only. As with Figure 5, a duplicate set of antenna elements, operated on the opposite polarisation, would be connected to the corresponding points on the other set of feed lines 12a. As can be seen, each antenna element is attached to a connection point, which are identified by respective letters a to e and these corresponding points are marked on the Figure 5. Upstream of points a, b, d and e are respective open circuits 21 which are constituted by a gap between two parallel sections of track 22. It will be noted that the parallel tracks 22, which are connected to points a and b, point in the opposite direction to those connected to points a and e and that in all cases they lie parallel to the longitudinal axis at the elongate printed circuit board 16.

Turning to Figure 4, a flexicircuit 18 carries generally C-shaped conductive strips 23. It will be noted that each strip 23 points towards the centre of the flexicircuit 17 and so those at the left hand side face oppositely to those at the right hand side. As is indicated in Figure 2, this flexicircuit 18 is adhered along the underface of the rigid block 17. Thus it is held in a position where the strips 23 overlie the arms 22 to form a capacitive RF connection across the open circuits 21 and it will further be understood that the degree to which the arms of the strips 23 overlie the arms 22 determines the length of the feed line at that particular point and hence the phase shift created by the feed line. Accordingly, by sliding the rigid block 17 and hence the flexicircuit 18 axially with respect to the printed circuit board the length of the feed lines connecting to points a, b, d and e can be lengthened or shortened dependent on the extent and direction of that movement. Thus if the block 17 moves from right to left the feed line connecting to points a and b are extended as the strips 23 move relative to the



arms 22 in the manner of a slide being pulled out on a trombone, whilst at the same time, because of the opposite sensing of the strips 23 on the right hand side of the flexicircuit, the feed lines connected to points d and e are effectively shortened, as is the air path in the trombone when the slide is pushed into the tubing. Thus when that movement takes place the phase shifts indicated in Figure 5 occur. As the movement is taking place with a single block the phase change relative to each portion of the feed line 12 is the same and so the stepped phase changes indicated in Figure 5 are readily and routinely obtained.

It will be noted that the only movement that needs to be achieved is the movement of the single block 17 and so no complex ganging or gearing needs to take place, nor is there any chance of mechanical wear or slackness introducing error. As the flexicircuit 18 is adhered to the rigid block 17 with the conductive strips 23 adjacent the block 17 all the sliding takes place on the undersurface of the flexicircuit and the strips 23 are not subjected to wear. The upper surface of the printed circuit board 16 can be lubriciously protected by being covered with a thin PTFE layer.

The rigid block 17 can be mounted in any suitable manner, but the Applicants have found that the arrangement illustrated is particularly convenient. This comprises a number of bolts 20 which are screwed through openings in the printed circuit board 16, into the chassis 15 along the central axis thereof. These bolts extend through slots 24 in the arm 19 to define precise linear travel for the arm 19 and hence the block 17. The bolts can be adjusted so that there is sufficient friction between the underside of the flexicircuit 18 and the printed circuit board 17 for any particular position to be retained frictionally. Continuous adjustment of the phase is therefore available. Preferably the linear movement of the arm 19 is achieved by a stepper motor (not shown) acting on a remote rod or rack so that the phase can be actuated remotely to the executive

ground tilt angle of the array can be achieved, either at ground or, even more preferably, from a remote control station. Often the adjustment will be made to reflect changing traffic profiles over a period of weeks or months, but the system is equally capable of allowing changing angles throughout a pre-set daily pattern, in the manner of traffic light delays, so that, for example, antennas near roads, carrying rush hour traffic, may require a greater down tilt during peak periods than at other times or, it could be a real time adjustment which reflects the traffic being handled by any particular array at any particular time.

The circuit illustrated is designed for 1710 to 2170 MHz wideband operation, when connected to wideband antenna elements. However, it can be scaled to other frequency bands eg 800 MHz to 1GHz, by those skilled in the art.

## CLAIMS

1. A phase shifting device for an array of antenna elements having respective antenna feed lines, formed on a printed circuit board, with respective open circuits formed therein, the device including a body slidable relative to the printed circuit board and carrying a plurality of conductive strips for forming an RF connection across respective open circuits, the strips being formed such that any given feed line is lengthened by movement of the element in one direction and shortened by movement in an opposite direction.
2. A device as claimed in claim 1 wherein the conductive strips are in the form of strips.
3. A device as claimed in claim 1 or claim 2 wherein the set of conductive strips is oppositely sensed from another set, such that on movement in the one direction the one set of strips move to lengthen their respective feed lines, whilst the other set shorten their respective feed lines.
4. A device as claimed in any one of the preceding claims wherein the conductive strips are capacitively connected to their respective feed lines.
5. A device as claimed in any one of the preceding claims wherein the element is a rigid RF transparent block.
6. A device as claimed in claim 5 wherein the conductive strips are printed, etched or formed on a surface of the block.
7. A device as claimed in claim 5 wherein the conductive strips are mounted on a flexicircuit that is fixed to the block with the body of the circuit interposable between the block and the printed circuit board.
8. A phase changing assembly including a printed circuit board for an array of antenna elements, the board having respective antenna feed lines formed thereon, each feed line having an open circuit formed thereon, a phase shifting device as claimed in any one of the preceding claims with the element slidably

mounted with respect to the printed circuit board and an actuator for causing the slidable movement.

9. An assembly as claimed in claim 8 wherein the printed circuit board is elongate and the element is movable in a longitudinally axial path.

5 10. A ground tilting antenna array comprising an assembly as claimed in claim 9 as dependent on claim 3 wherein the antenna elements are mounted in a vertical elongate array with the upper antennae connected to feed lines where length is lengthened when the element is moved in the one direction and the lower antenna elements are connected to the feed lines whose length is  
10 shortened when the element is moved in the one direction whereby a phase shift is caused along the length of the array.


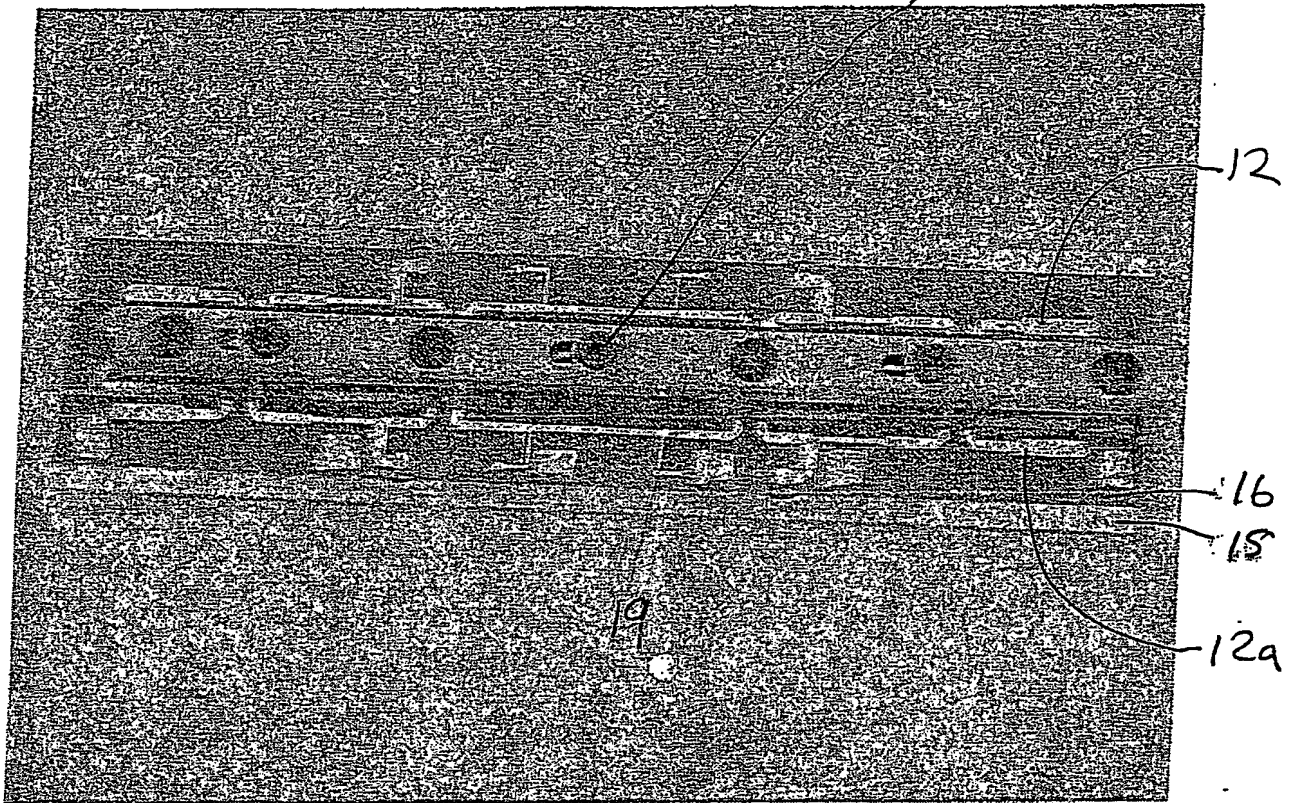


Figure 1

20 2/5

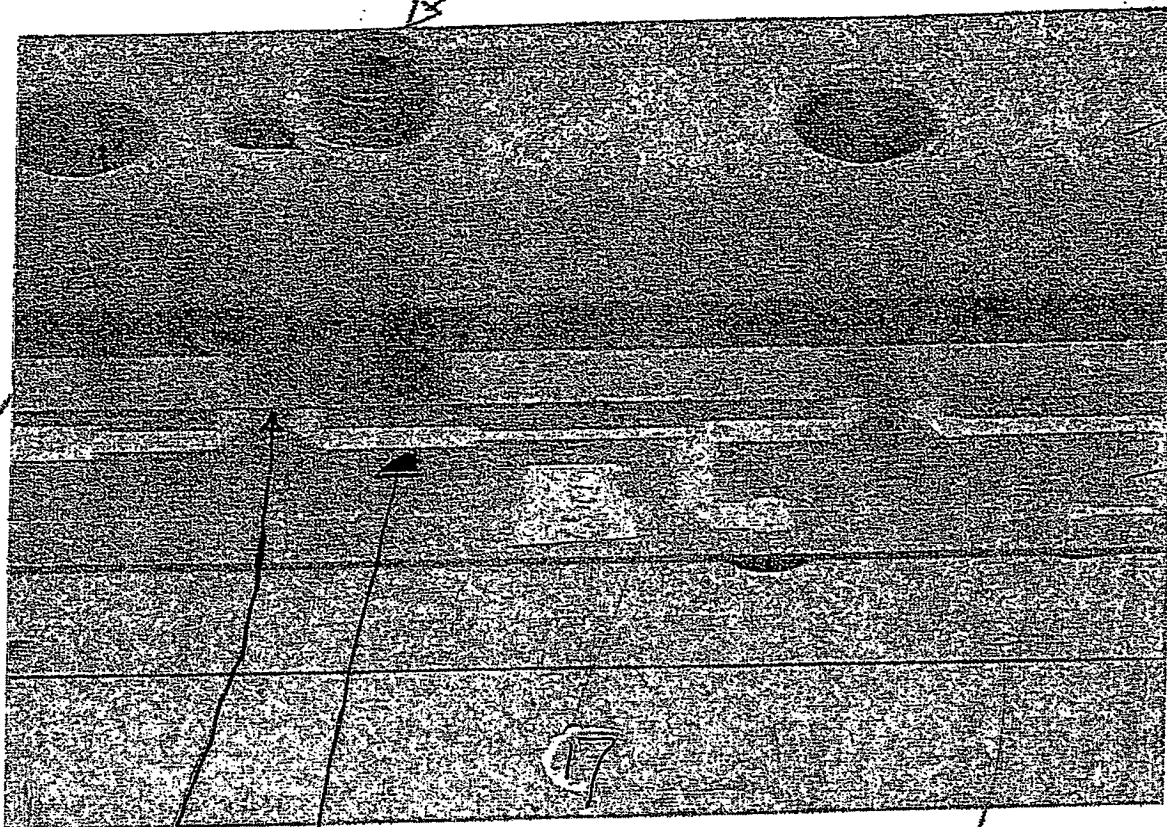

18

12 Figure 2

15

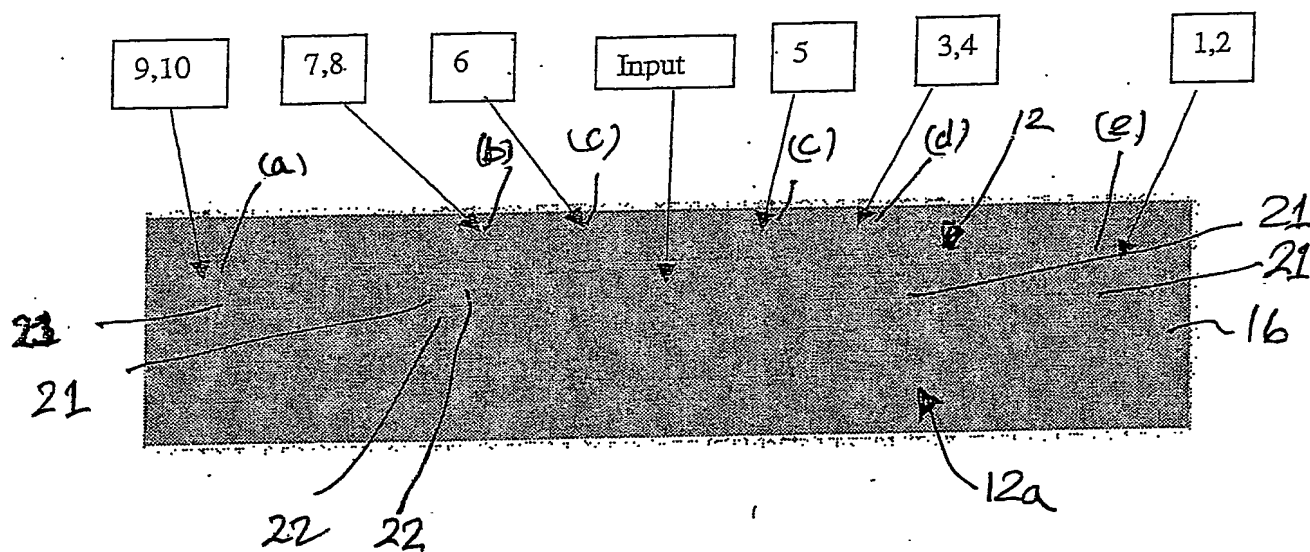


Fig 3 PCB Layout

4/5

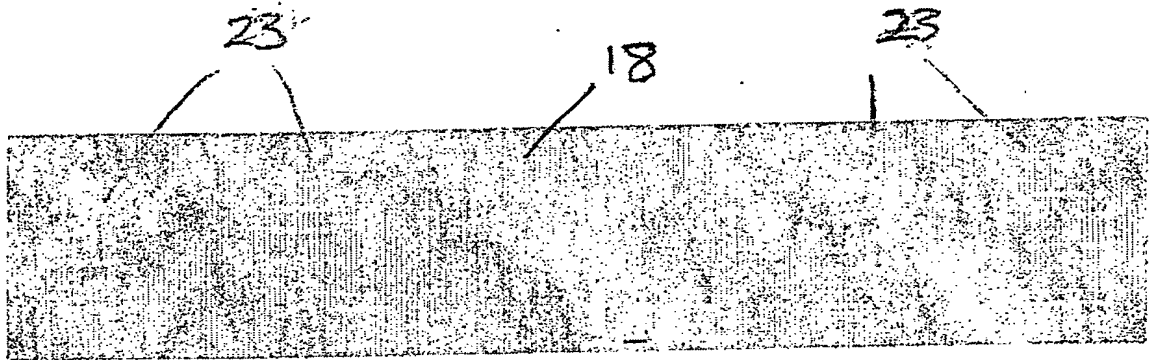


Fig 4 Flexible circuit



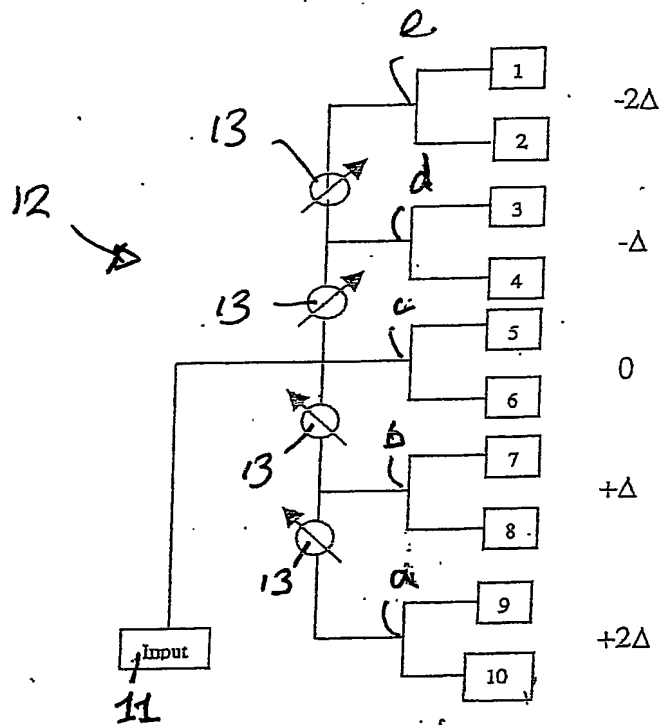


Figure 5.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**